

16-2-00

A

Please type a plus sign (+) inside this box → ☒Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL (Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))	Attorney Docket No.	06031P USA
	First Inventor or Application Identifier	Robert Sam Zorich
	Title	Multiple Contents Container Assembly For Ultrapure ...
	Express Mail Label No.	EL685717688US

APPLICATION ELEMENTS See MPEP chapter 600 concerning utility patent application contents.	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
1. <input checked="" type="checkbox"/> * Fee Transmittal Form (e.g., PTO/SB/17) (Submit an original and a duplicate for fee processing)	5. <input type="checkbox"/> Microfiche Computer Program (Appendix)
2. <input checked="" type="checkbox"/> Specification [Total Pages 32] (preferred arrangement set forth below) <ul style="list-style-type: none">- Descriptive title of the invention- Cross References to Related Applications- Statement Regarding Fed sponsored R & D- Reference to Microfiche Appendix- Background of the invention- Brief Summary of the invention- Brief Description of the Drawings (if filed)- Detailed Description- Claim(s)- Abstract of the Disclosure	6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) <ul style="list-style-type: none">a. <input type="checkbox"/> Computer Readable Copyb. <input type="checkbox"/> Paper Copy (identical to computer copy)c. <input type="checkbox"/> Statement verifying identity of above copies
3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets 8]	ACCOMPANYING APPLICATION PARTS
4. Oath or Declaration [Total Pages 3] <i>unexecuted</i> <ul style="list-style-type: none">a. <input type="checkbox"/> Newly executed (original or copy)b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. § 1.63(d)) (for continuation/divisional with Box 16 completed)<ul style="list-style-type: none">i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).	7. <input type="checkbox"/> Assignment Papers (cover sheet & document(s))
	8. <input type="checkbox"/> 37 C.F.R. § 3.73(b) Statement (when there is an assignee) <input checked="" type="checkbox"/> Power of Attorney
	9. <input type="checkbox"/> English Translation Document (if applicable)
	10. <input checked="" type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input checked="" type="checkbox"/> Copies of IDS Citations
	11. <input type="checkbox"/> Preliminary Amendment
	12. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
	13. <input type="checkbox"/> * Small Entity Statement filed in prior application, Status still proper and desired (PTO/SB/09-12)
	14. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed)
	15. <input type="checkbox"/> Other:
16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment: <input type="checkbox"/> Continuation <input type="checkbox"/> Divisional <input checked="" type="checkbox"/> Continuation-in-part (CIP) of prior application No: 60,213902 / 60,215792 Prior application information: Examiner _____ Group / Art Unit: _____ For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon if the information is not presently omitted from the submitted application parts.	
17. C <input checked="" type="checkbox"/> Customer Number or Bar Code Label (Insert 23543) or <input type="checkbox"/> Correspondence address below (if here) _____	
Name _____ Air Products and Chemicals, Inc.	
Address _____	
City _____	State _____ Zip Code _____
Country _____	Telephone _____ Fax _____

Name (Print/Type)	Geoffrey L. Chase	Registration No. (Attorney/Agent)	28,059
Signature	<i>Geoffrey L. Chase</i>	Date	Sept. 29, 2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

FEE TRANSMITTAL for FY 2000

Patent fees are subject to annual revision.
Small Entity payments must be supported by a small entity statement,
otherwise large entity fees must be paid. See Forms PTO/SB/09-12.
See 37 C.F.R. §§ 1.27 and 1.28.

TOTAL AMOUNT OF PAYMENT (\$) 1,200.00

Complete if Known

Application Number
Filing Date September 29, 2000
First Named Inventor Robert Sam Zorich
Examiner Name
Group / Art Unit
Attorney Docket No. 06031P USA

METHOD OF PAYMENT (check one)

1. ☒ The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to:

Deposit Account Number 01-0493

Deposit Account Name Air Products and Chemicals

- ☒ Charge Any Additional Fee Required
Under 37 CFR §§ 1.16 and 1.17

2. ☐ Payment Enclosed:
☐ Check ☐ Money Order ☐ Other

FEE CALCULATION

1. BASIC FILING FEE

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid
101 690	201 345	Utility filing fee	690.0
106 310	206 155	Design filing fee	
107 480	207 240	Plant filing fee	
108 690	208 345	Reissue filing fee	
114 150	214 75	Provisional filing fee	

SUBTOTAL (1) (\$) 690.00

2. EXTRA CLAIM FEES

Total Claims	Extra Claims	Fee from below	Fee Paid
44	-20** = 24	18	432.00
Independent Claims	4	-3** = 1	78.00
Multiple Dependent			

**or number previously paid, if greater; For Reissues, see below

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description
103 18	203 9	Claims in excess of 20
102 78	202 39	Independent claims in excess of 3
104 260	204 130	Multiple dependent claim, if not paid
109 78	209 39	** Reissue independent claims over original patent
110 18	210 9	** Reissue claims in excess of 20 and over original patent

SUBTOTAL (2) (\$) 510.00

FEE CALCULATION (continued)

3. ADDITIONAL FEES

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid
105 130	205 65	Surcharge - late filing fee or oath	
127 50	227 25	Surcharge - late provisional filing fee or cover sheet	
139 130	139 130	Non-English specification	
147 2,520	147 2,520	For filing a request for reexamination	
112 920*	112 920*	Requesting publication of SIR prior to Examiner action	
113 1,840*	113 1,840*	Requesting publication of SIR after Examiner action	
115 110	215 55	Extension for reply within first month	
116 380	216 190	Extension for reply within second month	
117 870	217 435	Extension for reply within third month	
118 1,360	218 680	Extension for reply within fourth month	
128 1,850	228 925	Extension for reply within fifth month	
119 300	219 150	Notice of Appeal	
120 300	220 150	Filing a brief in support of an appeal	
121 260	221 130	Request for oral hearing	
138 1,510	138 1,510	Petition to institute a public use proceeding	
140 110	240 55	Petition to revive - unavoidable	
141 1,210	241 605	Petition to revive - unintentional	
142 1,210	242 605	Utility issue fee (or reissue)	
143 430	243 215	Design issue fee	
144 580	244 290	Plant issue fee	
122 130	122 130	Petitions to the Commissioner	
123 50	123 50	Petitions related to provisional applications	
126 240	126 240	Submission of Information Disclosure Stmt	
581 40	581 40	Recording each patent assignment per property (times number of properties)	
146 690	246 345	Filing a submission after final rejection (37 CFR § 1.129(a))	
149 690	249 345	For each additional invention to be examined (37 CFR § 1.129(b))	

Other fee (specify) _____

Other fee (specify) _____

* Reduced by Basic Filing Fee Paid

SUBTOTAL (3) (\$)

SUBMITTED BY

Name (Print/Type) Geoffrey L. Chase

Registration No. (Attorney/Agent) 28,059

Complete (if applicable)

Telephone 610-481-7265

Signature *Geoffrey L. Chase*

Date September 29, 2000

WARNING:

Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

TITLE OF THE INVENTION:

MULTIPLE CONTENTS CONTAINER ASSEMBLY
FOR ULTRAPURE SOLVENT PURGING

CROSS-REFERENCE TO RELATED APPLICATIONS

The present application is a continuation-in-part of Provisional patent applications 60/213,092 of 21 June 2000 and 60/215,796 of 5 July 2000.

5 STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR
DEVELOPMENT

Not applicable.

BACKGROUND OF THE INVENTION

10 The Present Invention is directed to the field of process chemical delivery in the electronics industry and other applications requiring high purity chemical delivery. More specifically, the present invention is directed to apparatus and processes for the cleaning of process chemical delivery lines, containers and associated apparatus, particularly during changeout of process chemical or process chemical containers in such process
15 chemical delivery lines.

Evacuation and gas purge of process chemical lines has been used to remove residual chemicals from delivery lines. Both vacuum draw and inert gas purge are successful in quickly removing high volatility chemicals, but are not effective with low volatility chemicals. Safety is a problem when extracting highly toxic materials.

Use of solvents to remove residual chemicals is not new. Various patents have sought to clean systems using solvents, which are hereby specifically incorporated by reference in their entirety herein:

US 5,045,117 describes a method and apparatus for cleaning printed wiring
5 assemblies with a solvent and vacuum action.

US5,115,576 discloses an apparatus and method of cleaning semiconductor wafers using isopropyl alcohol solvent.

Additional patents regarding solvent cleaning include; US4,357,175,
US4,832,753, US4,865,061, US4,871,416, US5,051,135, US5,106,404, US5,108,582,
10 US5,240,507, US5,304,253, US5,339,844, US5,425,183, US5,469,876, US5,509,431,
US5,538,025, US5,562,883 and Japanese 8-115886.

Various other prior art US Patents are in the same technical field as the Present Invention and are specifically incorporated by reference herein in their entirety:

USP 5,472,119 - 12/5/95 - Assembly for dispensing fluids from multiple containers;
15 USP 5,398,846 - 3/21/95 - Assembly for simultaneous dispensing of multiple fluids;
USP 5,297,767 - 3/29/94 - Multiple Container Holder;
USP 4,570,799 - 2/18/86 - Multiple Container Package;
USP 3,958,720 - 5/25/76 - Adjustable Multiple container dispensing apparatus;
USP 5,557,381 - 9/17/96 - Develop supplying unit with multiple containers;
20 USP 5,573,132 - 11/12/96 - Dispensing Container;
USP 5,409,141 - 4/25/95 - Two component mixing and delivery system;
USP 5,565,070 - 10/15/96 - Solvent vapor sucking method and solvent recovering
apparatus;
USP 4,537,660 - 8/27/85 - Vapor generating and recovering apparatus; and

USP 5,051,135 - 9/24/91 - Cleaning method using a solvent while preventing discharge of solvent vapors to the environment.

Current systems involving solvent purging of internal plumbing lines require separate solvent ampoules. These either take up space inside an existing cabinet or
5 require a separate cabinet with associated plumbing, purging and control features. In addition, these require the use of a solvent capture system to trap the spent solvent for return to the producer's site, or that must be handled as solvent waste.

BRIEF SUMMARY OF THE INVENTION

10 The Present Invention is a process and apparatus to deliver both process chemical and solvent for cleaning the process chemical in a solvent purge refill system along with an integral solvent capture ampoule, in a single "assembly" that permits ease of shipping, minimal end-user interaction, sufficient solvent for the solvent purge operation, without residual solvent, requiring disposal. This eliminates customer handling
15 of the solvent, and eliminates the customer's need to find a solvent waste facility, as residual solvent can be returned in the same package in one piece/one step.

BRIEF DESCRIPTION OF SEVERAL VIEWS OF THE DRAWINGS

FIG 1 is a schematic cross-sectional illustration of a first embodiment of the
20 Present Invention.

FIG 2 is a schematic cross-sectional illustration of an embodiment of the Present Invention.

FIG 3 is a schematic partial cross-sectional illustration of an embodiment of the Present Invention.

FIG 4 is a schematic cross-sectional illustration of an embodiment of the Present Invention.

FIG 5 is a perspective view of one of two mirror image mating bracket sections for holding the solvent ampoules on a source chemical container.

5 FIG 6 A and B are a plan view and a cross-sectional view of an embodiment of a solvent ampoule of the Present Invention.

FIG 7 is a perspective view of a source chemical container, solvent support bracket, solvent ampoule and solvent capture ampoule of a preferred embodiment of the Present Invention.

10 FIG 8 is a schematic illustration of a manifold for an embodiment of the Present Invention.

DETAILED DESCRIPTION OF THE INVENTION

15 The Present Invention comprises a plurality of vessels, minimally two vessels; typically, but not exclusively, made from stainless steel, or other suitable materials that are not reactive with the process chemical or solvents in question. The materials of construction of these containers can include, but is not limited to: various types of steel, 316 stainless steel, nickel, Hasteloy, aluminum, chromium or other metals; various types of plastics and polymers, including Teflon, polypropylene, polyethylene, and similar
20 compounds; ceramic materials, including silicon carbide, alumina, and similar compounds; and glass containers, including borosilicate glass, fused quartz and similar compounds.

 Either or both of the source chemical and solvent vessels may include liners, internal plating, and other materials of construction. The solvent and source chemical
25 container vessels are not required to be manufactured from the same material, such that

the source chemical container may be constructed from steel, while a solvent ampoule may be constructed from plastic, for example.

In addition, the solvent container may contain a plurality of chambers, fluidly communicating with a single outlet or a plurality of outlets, such that the solvent provided for solvent cleaning may be available for more than one cycle, and may be used for alternate chemistries, for example, one chamber may contain a washing ingredient, while another chamber may contain a rinsing ingredient. Finally, one or more chambers may contain a solvent sorption media, wherein one application is to convert a volatile organic chemical (VOC) residue into a solid waste for more convenient handling.

The main source chemical container comprises a large (from 1 liter to 200 or more liter) container, which comprises a sealed storage volume typically filled with process chemicals, a metallic or non-metallic diptube attached either permanently (welded) or removeably (bolted on) extending to near the bottom of the source chemical container, an internal or external level sense, with at least one of the level sensors placed in such a position, typically just above the bottom of the dip tube, that it can indicate low level in the source chemical container. This level sensor may comprise any of the following: metallic or non-metallic float sensors; discrete or continuous ultrasonic level sensors; continuous or discrete thermal sensors; capacitive and or conductivity based level sensors; RF based level sensors; and other similar internal level sensors; or external sensors such as scales, load cells, external ultrasonic or thermal sensors placed either on the container or around the chemical delivery lines; and other similar means for detecting low level.

The low level detection is routed to a solvent purge controller and/or to an operator in order to signal that a solvent purge process is required. The source chemical container will also comprise a plurality of valves, with a minimum of at least one outlet

valve attached to the diptube, and in most cases will include a second valve for inert push gas, and/or a third valve for transfer of process chemical from an independent source of process chemical. Each of these valves can be connected integrally either permanently (welded on) or removably (bolted on, through a VCR connection for example). The valves may be manual, but preferably are automatic, comprising pneumatic, electric, hydraulic or solenoid actuated valves.

The source chemical container also comprises a chime ring that is placed on support structures and is used to protect the process valves during shipment.

Another attribute of the source chemical container is that it may integrally contain one or more smaller or secondary "solvent" ampoules either mounted entirely within or otherwise integral to the source chemical container, as opposed to a separate ampoule welded on or bolted on to the source chemical container.

The secondary "solvent" ampoule comprises a small (50 milliliter to one liter) container, which comprises a sealed storage volume typically filled with a solvent that is selected by nature of it's solubility for the process chemical, a metallic or non-metallic diptube either permanently (welded) or removably (bolted on) extending to near the bottom of the solvent ampoule.

An external or internal level sensor may optionally be used in this application also, although with less of a requirement than is needed with the source chemical container. The purpose of this level sensor would be to indicate that the solvent ampoule is empty and to cease further attempts at solvent washing. This level sensor may comprise any of the following: metallic or non-metallic float sensors; discrete or continuous ultrasonic level sensors; continuous or discrete thermal sensors; capacitive and or conductivity based level sensors; RF based level sensors; and other similar internal level sensors; or external sensors such as scales, load cells, external ultrasonic

or thermal sensors placed either on the ampoule or around the chemical delivery lines; and other similar means for detecting low level.

The solvent ampoule also includes two openings in the ampoule, one connected to the diptube, and extending to the bottom of the ampoule such that all solvent may be used in the solvent purge process. The other opening extends only into the headspace of the solvent ampoule, and is used for alternately pressurizing, venting and depressurizing the solvent container during the solvent purge operation. These openings may be sealed with manual or pneumatically actuated valves, and attached to the solvent purge control manifold with standard VCR-type or other high purity connectors. The openings may also be sealed with automatically sealing quick disconnect fittings. Typically, the fittings on the solvent ampoule are keyed to prevent accidental crossing of the inlet (headspace) and outlet (diptube) volumes in the solvent ampoule.

This solvent ampoule may comprise a plurality of chambers separated by either vertical (longitudinal) or horizontal (lateral) barriers, which can be used to isolate various cleaning solvents reactive materials or rinse materials, and/or additional solvent for multiple cleaning operations, or for use as a solvent recovery ampoule, either by pushing the solvent into the chamber as a fluid, or by absorbing the solvent into a solid media, such as carbon, and any number of alternative solvent absorbing media, of which a number are available on the open market. This chamber or preferably ampoule is located such that solvent vapors or liquid can be drawn into it, either by process vacuum or through push gas pressure (fluidly communicating with the solvent ampoule), such elevated pressure potentially provided upon initial filling of the solvent ampoule. The sorbent media placed in the solvent capture ampoule can be a number of types of material suitable for trapping and holding the cleaning solvent. For example, activated

carbon may be used to capture volatile organic compounds, while materials such as acrylic polymers and caustic and/or acid neutralizers may be used depending on the solvent types. The sorbent material may also comprise liquids that can be used to improve the hazard ratings of the used solvent. Such sorbent materials can be

5 perfluorocarbons, chlorofluorocarbons, and hydrocarbons of either high volatility (such as the perfluorocarbons) or low volatility (such as oils, i.e., Fomblin type fluorocarbon vacuum pump oil), and similar inert compounds. Both low volatility and high volatility in inert sorbent materials may be used depending on process requirements.

Note that each chamber will have at least one, and in most cases a plurality of

10 ports for the delivery of the solvent to the process, and to provide inert gas pressure for pushing the solvent out of the ampoules. In the case of an absorbent ampoule, at least one, but in most cases a plurality of valves are used to direct the spent solvent into the ampoule and to provide a venting or vacuuming of the ampoule to accelerate the absorption of the solvent onto the media.

15 Additionally, the source of the pressure for the solvent ampoule may come from a pre-pressurization prior to delivery of the solvent ampoule, thereby precluding the need for an inert gas source on the solvent ampoule inlet, and even minimizing the need for such an inlet. Additionally, the capture ampoule may be provided under pre-established vacuum so that spent solvent material may be directed into it without the requirement of

20 a vent port on the solvent capture ampoule.

Additional ampoules can be used in order to accomplish the purposes of cleaning with a compound requiring a rinse and/or to accomplish the purpose of holding solvent absorbing media. Therefore, the use of multiple solvents and rinse solutions and absorbent media can all be envisioned using either multiple ampoules or ampoules with

25 multiple chambers.

The secondary solvent ampoule is then attached to the main source chemical container for shipping purposes. The attachment may be through a direct welding of the secondary ampoule to a portion of the source chemical container, i.e., by welding it to the chime supports; or to the container walls; or to a mounting bracket that is attached to the source chemical container. The attachment can also include bolting the secondary ampoule to the primary (source chemical) container, either through means of a clamp that secures the small ampoule to the chime ring, chime ring support, or to the main body of the container, and through any means of mounting brackets, welded, clamped or bolted to the source chemical container.

In addition, the solvent ampoule may be placed internal to the larger source chemical container so that the only visible part of the solvent ampoule is the two tube connections. In this case, the solvent ampoule may be welded, clamped or bolted to the interior of the source chemical container, and may comprise any combination of separate ampoule walls or shared ampoule walls.

In operation, the source chemical container is connected to a chemical delivery line, such that process chemical may flow to a suitable reaction system. This chemical line includes valves and other components required to perform the solvent purge operation. The solvent ampoule also connects to the solvent purge manifold through additional valving, allowing the solvent to flow in a suitable manner, when commanded to by the operator or by an electronic control unit. The process line communicates with the solvent ampoule through this manifold. When installed, the valves on the solvent ampoule are connected to the solvent purge operation in a leak tight manner, such that the solvent can be transmitted throughout the key affected regions of the process chemical delivery line, that are isolated by the solvent purge manifold control valves.

This control may be either manual or automatic and both manual, electrical, pneumatic and hydraulic valves are contemplated.

In one particular embodiment, the main source chemical container is one of the family of 4, 11, 19, and 38 liter stainless steel containers, comprising a variety of level sensors, and containing either two or three valves on the source chemical container. One of the valves communicates with a stainless steel diptube, that protrudes into the chemical volume and is used for dispensing the process chemical. These containers each may contain a chime ring and chime supports. However, a chime ring is not a requirement of this invention, and a suitable container with internal solvent and capture ampoules can be envisioned, without the need for a chime ring or chime ring supports.

The large container may contain any process chemicals or high purity source chemicals, including but not limited to: tantalum pentaethoxide (TAETO), tetrakis(diethylamino) titanium (TDEAT), tetrakis(dimethylamino) titanium (TDMAT), copper hexafluoroacetylacetonate- trimethylvinylsilane (Cu(hfac)TMVS) and similar CVD copper precursors, tetraethylorthosilicate (TEOS) and other chemical vapor deposition (CVD) silicon precursors such as tetramethylcyclotetrasiloxane (TMCTS), boron and phosphorus containing CVD precursors such as trimethylborate (TMB), triethylborate (TEB), trimethylphosphite (TMPi), and triethylphosphate (TEPO), bistertiarybutylaminosilane (BTBAS), tantalum tetraethoxidedimethylaminoethoxide (TAT-DMAE), t-butylimidotrisdiethylamido tantalum (TBTDET), triethyl arsenate (TEASAT) and similar arsenic precursors such as triethyl arsenite (TEOA), low-K spin on materials such as VELOX polyarylene ethers available from Air Products and Chemicals, Inc. of Allentown, PA, FLARE fluorinated arylenes available from Honeywell, SILK aromatic hydrocarbon resins available from Dow Chemical of Midland, Michigan, and

other related compounds, where rapid, complete removal of the process chemical benefits from washing of the process piping with a suitable solvent.

The source chemical solvent ampoule is filled with a quantity of source chemical solvent contained in said source chemical solvent ampoule comprising organic alcohols
5 such as methanol, ethanol, propanol, butanol, acetone, tetrahydrofuran, dimethylsiloxane, water, aliphatic hydrocarbons such as hexane, heptane, octane, decane, and dodecane, aromatic hydrocarbons, ketones, aldehydes, hydrocarbons, ethers, esters, glymes, aromatic hydrocarbons, halogen containing alcohols, alkyl nitriles, alkanols, organic amines, fluorinated compounds and perfluorocarbons
10 perfluorohexane, perfluoroheptane and mixtures thereof.

Note also that process chemicals that are reactive, but provide soluble byproducts are also amenable to the present invention, and that the term solvent, in the present invention, is also contemplated in the broad definition of a "solvent" for purposes of the present invention. Included in this category of reactive "solvents" are acids,
15 bases, and reactive solvents. Specific examples are; the use of ethanol with TDEAT, in which titanium ethoxide is produced, and which is soluble in ethanol, ensuring complete removal. Use of nitric acid solutions can be used to remove copper oxidation byproducts, while HF solutions can be used to remove oxidation byproduct materials, such as titanium oxide or tantalum oxide. Such reactive source chemical "solvents" are
20 broadly contemplated as a quantity of source chemical acids or bases, that act in combination as a solvent for the high purity source chemical, or that may react with the high purity source chemical to create high solubility byproducts. This group may comprise HF, HNO₃, HCl, H₂SO₄, NaOH, KOH, and various other oxidizing and/or reducing agents, as well as organic acids and alkalis that are suitable for reacting or
25 removing the precursor material.

The sorbent media for the source chemical solvent, the residual source chemical cleaned from the solvent purge manifold and any byproducts of any reaction between the solvent and the source chemical may comprise zeolites, aluminosilicates, phosphosilicates, carbon, silica, alumina, molecular sieve, carbon molecular sieve, polymeric adsorbents, polyethylene, polypropylene, resin beds, clays, porous ceramics and other media that has a high surface area and has an affinity for such solvent, source chemical and resulting byproducts. Additionally, the sorbent media may comprise a material that renders the solvent and/or the source chemical inert or at least non-flammable when mixed together in the solvent capture ampoule. It is envisioned that various fluorinated and perfluorinated organic or hydrocarbon liquids or solids would be included in such class of sorbent media. Perfluorocarbons, such as; perfluorohexane, perfluoroheptane and mixtures thereof are exemplary of such sorbent media. Additionally, inert compounds such as vacuum pump oils and/or similar low volatility hydrocarbon or fluorocarbon oils may be used.

The smaller solvent ampoule consists of a small, approximately 150-250 ml stainless steel ampoule comprising two valves, no level sense and a diptube communicating to the outlet valve. The outlet valves are in two styles, one uses standard manual or pneumatic valves, while the other uses quick disconnect fittings to connect to the solvent purge manifold. The small container is mounted to the larger source chemical container through means of a bracket assembly welded or bolted to the smaller solvent ampoule. This bracket assembly is then bolted onto the chime ring supports or chime ring of the source chemical container. Alternatively, the bracket assembly may also be attached directly to the source chemical container, for example by clamping to the neck of source chemical container, or by attachment with bolts, nuts, clips, clamps or other securing means. The absorbent media is placed into a separate

ampoule, and the ampoule is attached either removably (bolted on) or permanently (welded on) to the chime ring or chime ring supports. The bracket assembly may also be attached directly to the source chemical container, for example, by clamping to the neck of the container, or by attachment with bolts, nuts, clips, clamps or other securing devices. The sorbent media ampoule communicates with the solvent ampoule through valves and lines that permit either solvent vapor or solvent liquid to be pushed into the sorbent media ampoule.

In the Present Invention, the solvent wash, process chemical and solvent sorption/recovery containers are combined together into a single assembly suitable for shipping and replacing in one piece. This results in a reduced workload for the operator, by not having to replace a separate solvent ampoule; permits the use of fresh, clean solvent with each container replacement; minimizes waste of solvent; and provides the integrated circuit (IC) manufacturer with a mechanism by which he can remove residual quantities of potentially air sensitive or air sensitive, or low vapor pressure process chemicals from their delivery lines. It also eliminates or minimizes the need of the customer to provide any sort of toxic/solvent waste handling requirements. In systems that require separate solvent ampoules, the operator must cycle purge the solvent connections to prevent escape of solvent into the environment; dispose of waste or return a partially filled to filled ampoule of solvent under separate packaging; and must handle an additional vessel in their facility. Therefore, one of the primary benefits of the Present Invention is to reduce handling, increase safety, reduce shipping and waste costs, and confirm that the correct amount of solvent is present to perform the solvent purge task.

When a larger volume of solvent material is required to clean the solvent purge manifold, process lines, mass flow controllers, vaporizers and the like, these ampoules

may need to be sized so large as to make it impractical to mount integrally to the source chemical container. The present invention also encompasses those systems in which the solvent ampoule and solvent capture ampoule and the source chemical container are physically separate but are capable of being placed into a single cabinet or adjoining cabinets with fluid communication between the various vessels as described in the present invention.

With reference to FIG 1, an assembly is shown comprising a high purity source chemical container 10, a source chemical solvent ampoule 36 and a solvent capture ampoule 30. The assembly container 10 may be outfitted with a chime ring bracket 18.

The container 10 is outfitted with an outlet 22 and a pneumatic control valve 24, which dispense high purity liquid source chemical from an attached diptube 12 which extends from the outlet 22 to near or a point adjacent the bottom of the container 10 opposite the outlet 22 at the top or chime ring bracket 20 side of the container 10. This facilitates removal of high purity liquid source chemical 16, whose level is typically kept above the diptube 12 and the level sensor 14 which extends to a point slightly above the end of the diptube 12 so that liquid withdrawal can occur after the lowest level signal of the level sensor 14. The level sensor 14 exits the container 10 through a bung or inlet 42 typically closed by a threaded fitting. The level sensor 14 communicates electrically with an automated control unit or operator to control the valves of the assembly in cooperation with the level of high purity source chemical 16.

High purity source chemical could be withdrawn by vacuum, but preferably, a source of pressurizing inert gas, such as nitrogen or helium, is connected to pneumatic valve 28, which controls inlet 26 that communicates with the vapor headspace above the level of the high purity source chemical 16. The pressurizing gas forces liquid up the

diptube 12 for downstream use, such as TEOS used in growing silicon oxide on silicon wafers patterned for integrated circuits in an electronics fab furnace.

The high purity source chemical is delivered through a manifold, not shown, to such furnace. During changeout of the container 10, it is desirable to clean the manifold, and for low vapor pressure chemicals, merely drawing a vacuum or using
5 pressurizing gas can be insufficient. Solvent cleaning is desirable.

Solvent compatible to dissolve the high purity source chemical is contained in source chemical solvent ampoule 36, which is welded 44 to the support arm 18 of the chime ring bracket 20. The ampoule 36 has an inlet 38 and outlet 40 which operate
10 much the same as the inlet and outlet of the container 10 using pressurizing gas to force solvent out of the outlet 40 by means of the diptube 46.

The solvent passes through the manifold, shown in FIG 8, to remove residual high purity source chemical, which is collected as a waste stream of solvent and chemical in the solvent capture ampoule 30 via inlet 32. The ampoule 30 is also fitted
15 with an outlet 34 for convenience of regeneration. Ampoule 30 preferably has a diptube 35 connected to outlet 34 to facilitate cleanout of ampoule 30 and to reduce manufacturing parts so that ampoule 30 is interchangeable with ampoule 36, but it is also contemplated that ampoule 30 would not have a diptube 35 attached to outlet 34. The ampoule 30 can be an empty receiving ampoule or it can be filled with a sorbent for
20 the solvent and chemical, such as silica.

The inlets and outlets of both ampoules can preferably be operated by valves connected to the automated control unit, not illustrated.

With reference to FIG 2, common parts are labeled with the same part numbers as FIG 1 and will not necessarily be repeated in this description of this second
25 embodiment showing the ampoules situated in the interior of the container 10. The

source chemical solvent ampoule 48 has an inlet 50 and an outlet 52 that function similarly to the assembly of FIG 1, with outlet 52 having an integral diptube 54. Used solvent from ampoule 48 after passing through the manifold, not shown, is recovered in the interiorly situated solvent capture ampoule 56, which has an inlet 58 and outlet 60, which operate in a manner consistent with the assembly of FIG 1. Outlet 60 may have a diptube 61, if desired.

With reference to FIG 3, common parts are labeled with the same part numbers as FIG 1 and will not necessarily be repeated in this description of this third embodiment showing a baffled ampoule 62 having discrete solvents 88 and 90 or a solvent in one ampoule 66 and an empty ampoule 68 or sorbent filled ampoule 68. Either ampoule 66 and 68 could serve either function depending only on connection to the manifold and programming of the automated control unit. Ampoule 68 is outfitted with an inlet 74 and an outlet 72, the latter of which is integral to a diptube 70 for liquid out service. Pressurizing gas would be administered through inlet 74. Ampoule 66 being below ampoule 68 has a diptube 76 and 80, respectively, connected to each of its inlet 78 and outlet 82. The extent of any diptube or the existence of such a diptube is dependent on whether the ampoule is being used for solvent such as dual solvent delivery or whether it is being use as the solvent capture ampoule, with or without sorbent. The ampoules are welded to the chime ring bracket 20 by welds 84 and 86.

With reference to FIG 4, an alternate embodiment of the assembly is shown. Container 100 comprises chambers 102 and 104 separated by baffle 106. Each chamber has an inlet and an outlet. For instance, chamber 104 has an inlet 120 controlled by valve 122 and an outlet 118 controlled by valve 116 and ending in a diptube 114 functioning much as described with reference to FIG 1. A level sensor 124 and 126 passes through bung 112 to service each chamber respectively. The lower

chamber 102 has an inlet 132 and outlet 136 controlled by valves 134 and 138 respectively. Inlet tube 130 accesses the headspace of chamber 102, and diptube 128 withdraws liquid source chemical based upon the pressure of the pressurizing gas entering via tube 130, as described in similar circumstance with regard to FIG 1. This
5 allows for several source chemicals to be transported and contained in one assembly. Although the ampoules for solvent and solvent capture are not illustrated, it is appreciated that the same configuration of ampoules can be used with container 100 as is described for FIGs 1-3.

With reference to FIG 5, one 140 of two mating sections of an ampoule bracket
10 is shown. Ampoule bracket section 140 fits around the assembly bung 42 (FIG 1) and clamps by friction fit the outer edge of bung 42 by turning bolts which threadably engage engagement holes 148. Edge 146 interfaces with the bung 42. The source chemical solvent ampoule 36 (FIG 1) and the solvent capture ampoule 30 (FIG 1) fit into either of holders 142 and 144 which frictionally engage the ampoules by threaded engagement
15 holes 150 and 152 using bolts, not illustrated. The ampoules rest on support surfaces 154 and 156.

With reference to FIG 6 A and B, a source chemical solvent ampoule 158 is shown in greater detail. The ampoule 158 has inlet 164 and outlet 162 connected to diptube 160. This allows liquid solvent to be removed, generally from level 166, full, to
20 level 168, empty.

A perspective view of the assembly of the Present Invention is shown in FIG 7. Container 170 has ampoule bracket sections 174 and 176 holding ampoules 178 and 188. Each ampoule has an inlet 180 and 190 and one outlet 184 and 192, respectively. These are connected to quick disconnect fittings 194, 196, 186 and 182, respectively.
25 Container inlet 202 is controlled by pneumatic valve 204. Container outlet 200 is

controlled by pneumatic valve 198. These components are generally protected by the chime ring bracket 172. An optional level sense can be fitted through bung 206.

With reference to FIG 8, the manifold 214 in which the present invention's assembly operates and communicates is depicted. Source chemical solvent ampoule

5 208 is communicating with the solvent purge manifold 252 of high purity source chemical container 210 and solvent capture ampoule 212. It is also contemplated that this manifold connection can be made with ampoules internally positioned in the container 210. The solvent in ampoule 208 can either be under pressure from filling or can be

pressurized by an inert push or carrier gas 222 introduced through valve 216 to inlet 230

10 to force solvent up through diptube 228 to outlet 226 and through valve 220. Refill of the ampoule 208 can be accomplished through inlet 232 controlled by valve 218 in receiving fresh or recycled solvent 224. Solvent from ampoule 208 passes through line 238 and

valves 240 and 246 to clean the solvent purge manifold 252 which is defined by valves 246, 250, 266 and 254. Vacuum can be applied to line 238 particularly during cleanout

15 through valve 234 and vacuum source 236. Additionally, inert purge gas can be administered from source 242 and valve 244 to clean out line 238. High purity source chemical in container 210 is pushed out of diptube 260 by an inert push gas source 258

controlled by valve 256 communicating with container 210 through inlet 264. An additional fill inlet to replenish source chemical is contemplated but not illustrated.

20 Source chemical passes through valve 254 to solvent purge manifold 252 and through valve 250 to a point of use 248 or end use, such as an electronics fabrication process tool to make integrated circuits or computer chips. During clean out of the solvent purge manifold 252, solvent is cycled through the manifold 252 from valve 246 through valve

266 by the force of the solvent's pressure or push gas or the vacuum that may exist in

capture ampoule 212. This forces solvent, residual source chemical or any

25

decomposition products, if the solvent is reactive with the source chemical, to pass through line 268, line 270, valve 272, inlet 274 and capture ampoule 212 which may be empty or it may contain a sorption media. The solvent capture is activated potentially by vacuum drawn on ampoule 212 through outlet 276, valve 278, lines 280 and 284 toward
5 a source of vacuum 286. That source may contain abatement or appropriate traps for various contemplated chemicals and solvents. Alternately, vacuum can be bypassed around ampoule 212 by opening valve 282 and closing valves 272 and 278. It is contemplated that capture ampoule 212 does not need to be connected to a vacuum source 286, but can rely on vacuum conditions pre-established in ampoule 212 in a
10 sealed fashion upon manufacture or refilling or refurbishing, or reliance can be made on the pressurized solvent to move the chemicals to ampoule 212 with or without venting through line 284.

The Present Invention provides a significant advantage in the use of high purity chemicals in a delivery system, such as in the electronics fabrication industry.
15 Maintenance of the high purity of the source chemical requires not only the purity of the source chemical, but also the delivery system through which the chemical is dispensed. Traditionally, the industry has used multiple cycles of vacuum and purging with an inert pressurized gas to maintain cleanliness of the delivery system. However, with low volatility chemicals, such cyclic cleaning is not sufficient. Solvents for such low volatility
20 chemicals are desirable. The Present Invention provides a unique system for providing such solvents and their disposal without adversely effecting the traditional way in which operators in the electronic fabrication industry utilize containers of source chemicals. This provides essentially a seamless system for providing ultra cleanliness for even difficult source chemicals, such as low volatility chemicals and overcomes a long
25 standing problem of sustaining purity of source chemicals through process lines and

changeout of containers of such source chemicals and sequential use of different source chemicals in the same delivery system.

The Present Invention has been set forth with regard to several preferred embodiments, but the full scope of the invention should be ascertained from claims

5 which follow.

n:\docnos\06031\usa\appln\6031P usa.doc

CLAIMS

1. A high purity source chemical container assembly, comprising; a high purity source chemical container, at least one inlet to the interior of the source chemical container, at least one outlet from the interior of the source chemical container, at least one source chemical solvent ampoule integral to said assembly, at least one inlet to the interior of the source chemical solvent ampoule, at least one outlet from the interior of the source chemical solvent ampoule, at least one solvent capture ampoule integral to said assembly sized to accommodate source chemical solvent from said source chemical solvent ampoule, and at least one orifice communicating with the interior of the solvent capture ampoule.
2. The assembly of Claim 1 wherein the source chemical solvent ampoule and the solvent capture ampoule comprise a single baffled ampoule.
3. The assembly of Claim 1 wherein the source chemical solvent ampoule is inside said high purity source chemical container and said inlet to the interior of the source chemical solvent ampoule and said outlet from the interior of the source chemical solvent ampoule access an exterior of said high purity source chemical container.
4. The assembly of Claim 1 wherein the solvent capture ampoule is inside said high purity source chemical container and said orifice communicating with the interior of the solvent capture ampoule accesses an exterior of said high purity source chemical container.

5. The assembly of Claim 1 wherein said assembly has a chime ring bracket on an exterior of said high purity source chemical container.

6. The assembly of Claim 5 wherein said source chemical solvent ampoule is integral to said chime ring bracket.

7. The assembly of Claim 5 wherein said solvent capture ampoule is integral to said chime ring bracket.

8. The assembly of Claim 1 wherein said high purity source chemical container has a diptube connected to said outlet and extending to a point adjacent a bottom of said high purity source chemical container.

9. The assembly of Claim 1 wherein said high purity source chemical container has a level sensor communicating with an exterior of said container and extending to a point adjacent a bottom of said high purity source chemical container.

10. The assembly of Claim 9 wherein said level sensor is selected from the group consisting of a float level sensor, an ultrasonic level sensor, a capacitance level sensor, an optical level sensor and combinations thereof.

11. The assembly of Claim 1 wherein said inlet and said outlet of said high purity source chemical container each have a valve for controlling flow of pressurizing fluid or high purity source chemical, respectively.

12. The assembly of Claim 11 wherein said valve is selected from the group consisting of a pneumatic valve, a solenoid valve, a manual valve and combinations thereof.

5 13. The assembly of Claim 1 wherein said source chemical solvent ampoule has a diptube connected to said outlet of said source chemical solvent ampoule and extending to a point adjacent a bottom of said source chemical solvent ampoule.

10 14. The assembly of Claim 1 wherein said inlet to said high purity source chemical container is connected to a source of pressurizing inert gas.

15 15. The assembly of Claim 1 wherein said inlet to said source chemical solvent ampoule is connected to a source of pressurizing inert gas.

20 16. The assembly of Claim 1 wherein said source chemical solvent ampoule contains a solvent under pressure without connection to an external source of pressure.

17. The assembly of Claim 1 wherein said solvent capture ampoule has two orifices.

25 18. The assembly of Claim 17 wherein one of said orifices of said solvent capture ampoule is connected to one of a low pressure vent or source of vacuum.

19. The assembly of Claim 1 wherein the interior of said solvent capture ampoule is under vacuum without connection to a source of vacuum.

20. The assembly of Claim 1 wherein said assembly has a quantity of high purity source chemical contained in said high purity source chemical container selected from the group consisting of tantalum pentaethoxide (TAETO), tetrakis(diethylamino) titanium (TDEAT), tetrakis(dimethylamino) titanium (TDMAT), tetramethylcyclotetrasiloxane (TMCTS), copper hexafluoroacetylacetonate- trimethylvinylsilane (Cu(hfac)TMVS), tetraethylorthosilicate (TEOS), trimethylborate (TMB), triethylborate (TEB), trimethylphosphite (TMPi), triethylphosphate (TEPO), bistertiarybutylaminosilane (BTBAS), tantalumtetraethoxidedimethylaminoethoxide (TAT-DMAE), t-butylimidotrisdiethylamido tantalum (TBTDET), triethyl arsenite (TEOA), polyarylene ethers and mixtures thereof.

21. The assembly of Claim 1 wherein said assembly has a quantity of source chemical solvent contained in said source chemical solvent ampoule selected from the group consisting of organic alcohols such as methanol, ethanol, propanol, butanol, acetone, tetrahydrofuran, dimethylsiloxane, water, aliphatic hydrocarbons such as hexane, heptane, octane, decane, and dodecane, aromatic hydrocarbons, ketones, aldehydes, hydrocarbons, ethers, esters, glymes, aromatic hydrocarbons, halogen containing alcohols, alkyl nitriles, alkanols, organic amines, fluorinated compounds, perfluorocarbons such as perfluorohexane and perfluoroheptane and mixtures thereof.

22. The assembly of Claim 1 wherein said solvent capture ampoule contains a sorbent for said solvent.

23. The assembly of Claim 1 wherein said solvent capture ampoule contains a sorbent for said solvent and said high purity source chemical.

24. The assembly of Claim 23 wherein said sorbent is selected from the group consisting of zeolites, aluminosilicates, phosphosilicates, carbon, silica, alumina, molecular sieve, carbon molecular sieve, polymeric adsorbents, polyethylene, polypropylene, resin beds, clays, porous ceramics and mixtures thereof.

25. The assembly of Claim 23 wherein said sorbent renders said solvent and said high purity source chemical non-flammable and/or non-hazardous.

26. The assembly of Claim 25 wherein said sorbent is a perfluorocarbon.

27. The assembly of Claim 25 wherein said sorbent is a low volatility oil.

28. The assembly of Claim 1 wherein said high purity source chemical container has a baffle to define two chambers to contain two distinct high purity source chemicals wherein each chamber has at least one inlet to the interior of such chamber and at least one outlet from the interior of such chamber.

29. The assembly of Claim 28 wherein said high purity source chemical container chambers each have a level sensor communicating with an exterior of said chamber, respectively, and extending to a point adjacent a bottom of said chamber, respectively.

30. The assembly of Claim 1 wherein said source chemical solvent ampoule and said solvent capture ampoule each are affixed to said assembly by a fastening selected from

the group consisting of welding, soldering, bolting, screwing, strapping, bracketing and combinations thereof.

31. The assembly of Claim 1 wherein said source chemical solvent ampoule and said solvent capture ampoule each are affixed to said assembly by an ampoule bracket integral to said assembly comprising two ampoule bracket sections which interface with one another to engage each ampoule.

32. The assembly of Claim 31 wherein the engagement is a friction fit of the two ampoule bracket sections with said ampoules.

33. A high purity source chemical container assembly, comprising; a high purity source chemical container, an inlet to the interior of the source chemical container having an integral pneumatic valve for connection to a source of pressurizing inert gas, an outlet from the interior of the source chemical container having an integral pneumatic valve for connection to a manifold to deliver high purity source chemical to a downstream process using said chemical said outlet having a diptube extending to a point adjacent a bottom of said source chemical container, at least one source chemical solvent ampoule integral to said assembly, an inlet to the interior of the source chemical solvent ampoule having an integral pneumatic valve for connection to a source of pressurizing inert gas, an outlet from the interior of the source chemical solvent ampoule having an integral pneumatic valve for connection to said manifold which delivers high purity source chemical to a downstream process, a solvent capture ampoule integral to said assembly sized to accommodate source chemical solvent from said source chemical solvent ampoule, and an orifice communicating with the interior of the solvent

capture ampoule to receive source chemical solvent from said source chemical solvent ampoule through said manifold.

34. The assembly of Claim 33 wherein said source chemical solvent ampoule and said solvent capture ampoule each are affixed to said assembly by an ampoule bracket integral to said assembly comprising two ampoule bracket sections which interface with one another to engage each ampoule by a friction fit of the two ampoule bracket portions with said ampoules.

35. The assembly of Claim 33 wherein said source chemical solvent ampoule contains a solvent under pressure without connection to an external source of pressure.

36. The assembly of Claim 33 wherein the interior of said solvent capture ampoule is under vacuum without connection to a source of vacuum.

37. The assembly of Claim 33 wherein the source chemical solvent ampoule and the solvent capture ampoule comprise a single baffled ampoule.

38. The assembly of Claim 33 wherein the source chemical solvent ampoule is integral to the source chemical container by attachment selected from the group consisting of a chime ring bracket, the container, a bung, an ampoule bracket and combinations thereof.

39. The assembly of Claim 1 wherein the source chemical solvent ampoule is integral to the source chemical container by attachment to apparatus selected from the

group consisting of a chime ring bracket, the container, a bung, an ampoule bracket and combinations thereof.

40. The assembly of Claim 1 wherein said solvent capture ampoule has at least two
5 orifices comprising at least one inlet for solvent entry and at least one outlet to facilitate venting, each orifice having a valve for closing said orifices wherein said valve is selected from the group consisting of pneumatic, manual, electrical, hydraulic, solenoid and combinations thereof, a diptube that extends to near the bottom of the solvent capture ampoule and a level sense selected from the group consisting of floats, optical,
10 capacitive, weight, thermal, or combinations thereof.

41. The assembly of Claim 1 wherein said source chemical solvent ampoule contains a solvent for the high purity source chemical that reacts with the high purity source chemical to create soluble byproducts.

42. A high purity source chemical container assembly, comprising; a high purity source chemical container, an inlet to the interior of the source chemical container having an integral pneumatic valve for connection to a source of pressurizing inert gas, an outlet from the interior of the source chemical container having an integral pneumatic
20 valve for connection to a manifold to deliver high purity source chemical to a downstream process using said chemical said outlet having a diptube extending to a point adjacent a bottom of said source chemical container, at least one source chemical solvent ampoule integral to said assembly, an outlet from the interior of the source chemical solvent ampoule having an integral pneumatic valve for connection to said
25 manifold which delivers high purity source chemical to a downstream process, a solvent

capture ampoule integral to said assembly sized to accommodate source chemical solvent from said source chemical solvent ampoule, having an orifice communicating with the interior of the solvent capture ampoule to receive source chemical solvent from said source chemical solvent ampoule via said manifold.

5

43. A process for cleaning a manifold which delivers high purity source chemical from a high purity source chemical container assembly to a point of use wherein a high purity source chemical container having an inlet to the interior of the source chemical container having an integral pneumatic valve for connection to a source of pressurizing inert gas and an outlet from the interior of the source chemical container having an integral pneumatic valve for connection to said manifold to deliver high purity source chemical to a point of use wherein said outlet has a diptube extending to a point adjacent a bottom of said source chemical container, wherein after delivery of the source chemical to said manifold, the manifold is cleaned by delivering a source chemical solvent from a source chemical solvent ampoule integral to said assembly to said manifold by pressurizing said source chemical solvent ampoule through an inlet to the interior of the source chemical solvent ampoule having an integral pneumatic valve for connection to a source of pressurizing inert gas to deliver said source chemical solvent to an outlet from the interior of the source chemical solvent ampoule having an integral pneumatic valve for connection to said manifold and collecting said solvent and any source chemical carried by said solvent from said manifold in a solvent capture ampoule integral to said assembly sized to accommodate source chemical solvent from said source chemical solvent ampoule through an orifice communicating with the interior of the solvent capture ampoule to receive source chemical solvent from said source chemical solvent ampoule.
- 10
- 15
- 20
- 25

44. The process of Claim 43 wherein the opening and closing of valves and transfer of source chemical and source chemical solvent is controlled by an automated control unit communicating with such valves.

5

ABSTRACT OF THE DISCLOSURE

- 5 A process and apparatus to deliver both process chemical and solvent for
cleaning the process chemical in a solvent purge refill system along with an integral
solvent sorption module, in a single "assembly" that permits ease of shipping, minimal
end-user interaction, sufficient solvent for the solvent purge operation, without residual
solvent, requiring disposal. This eliminates customer handling of the solvent, and
10 eliminates the customer's need to find a solvent waste facility, as residual solvent can be
returned in the same package in one piece/one step.

15

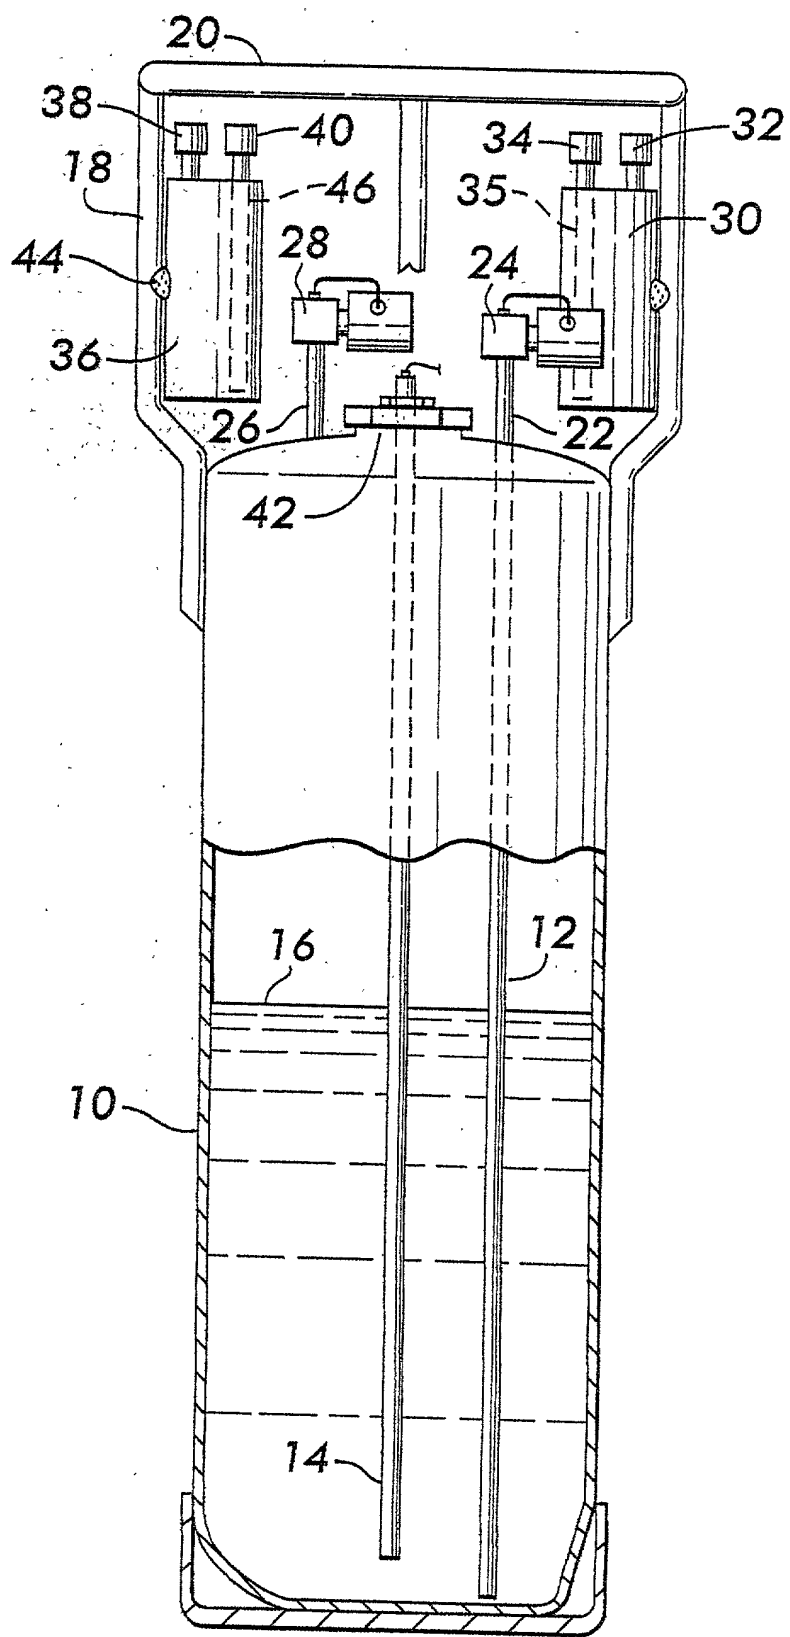


FIG. 1

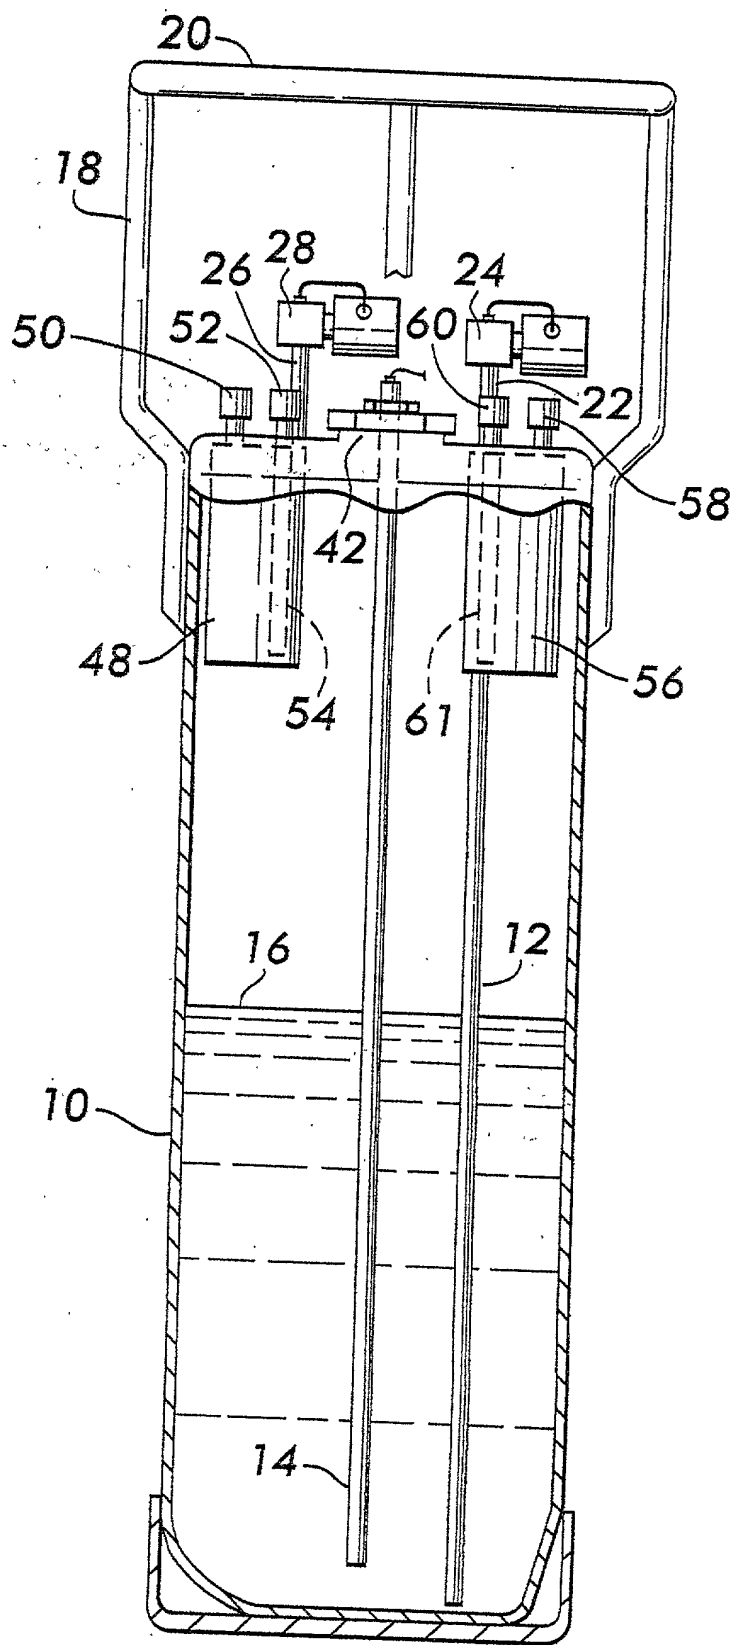


FIG.2

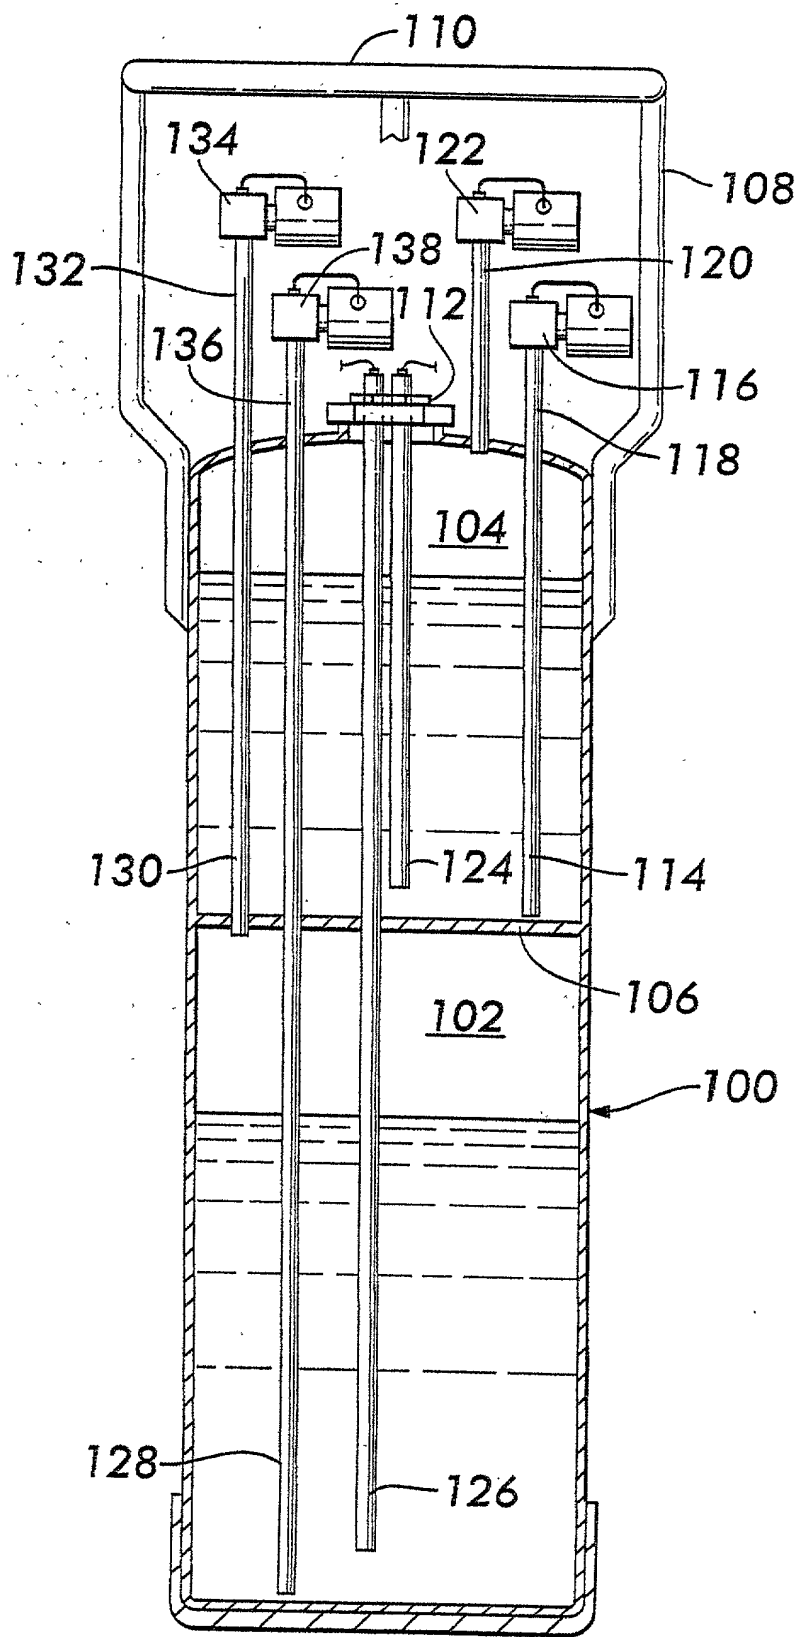


FIG.4

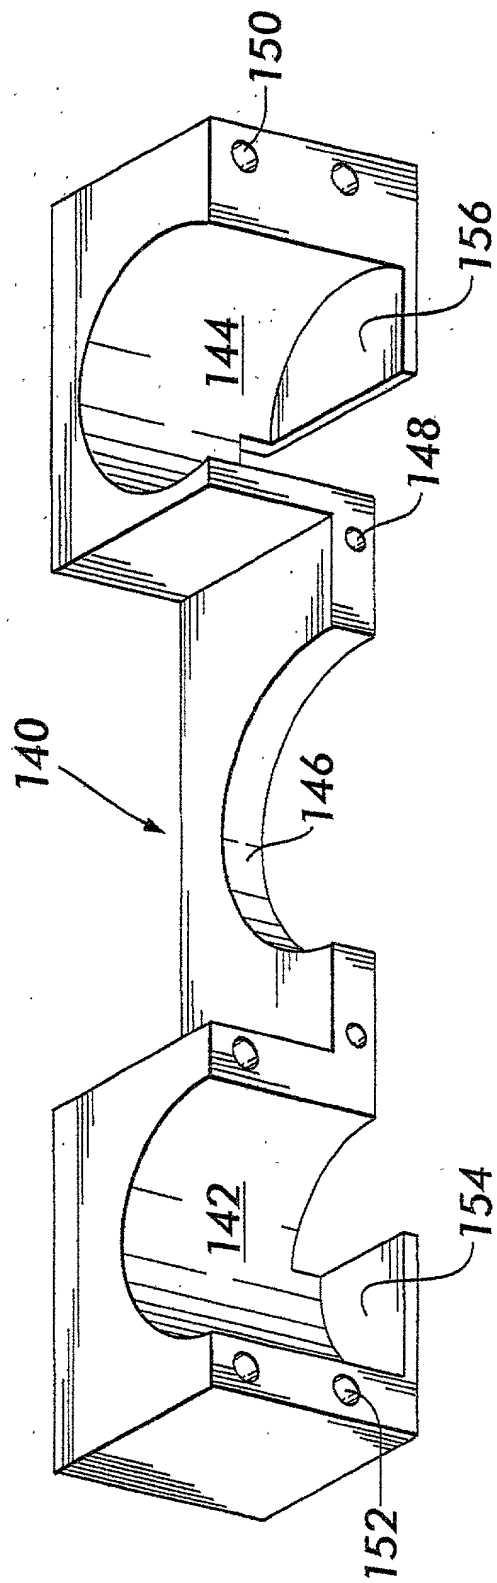


FIG. 5

FIG. 6A

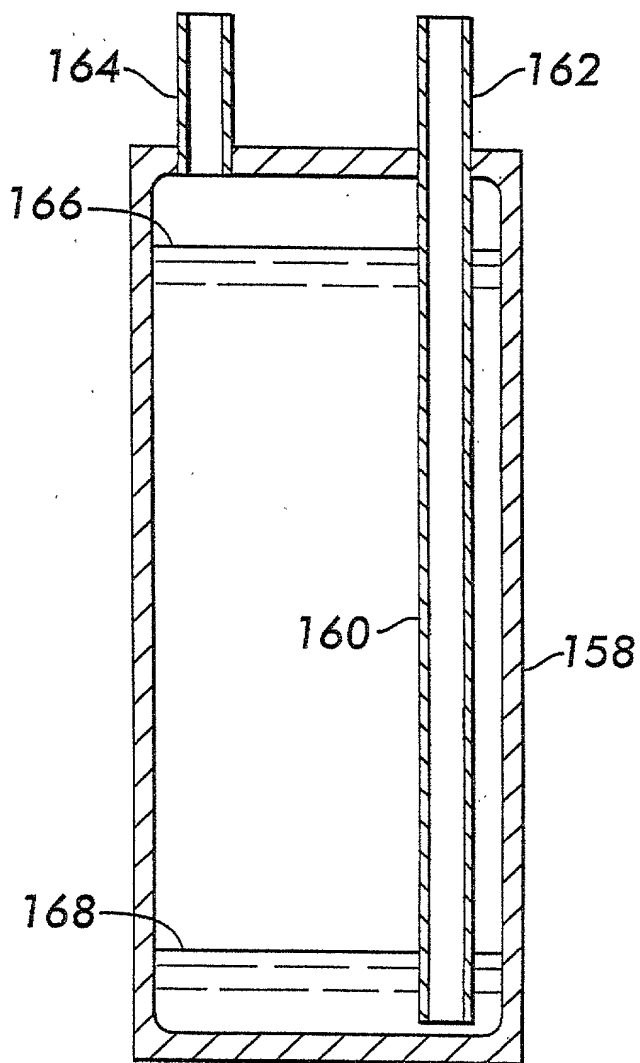
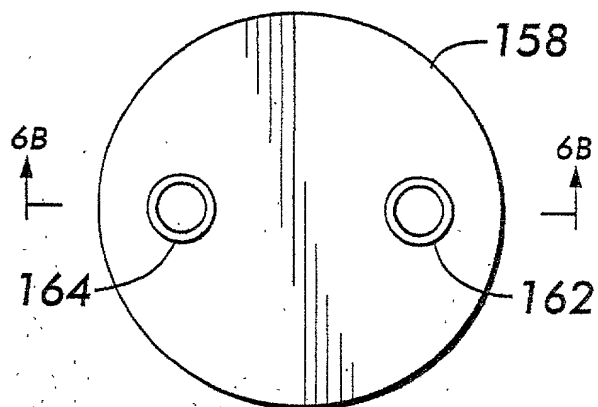


FIG. 6B

000000-9252500


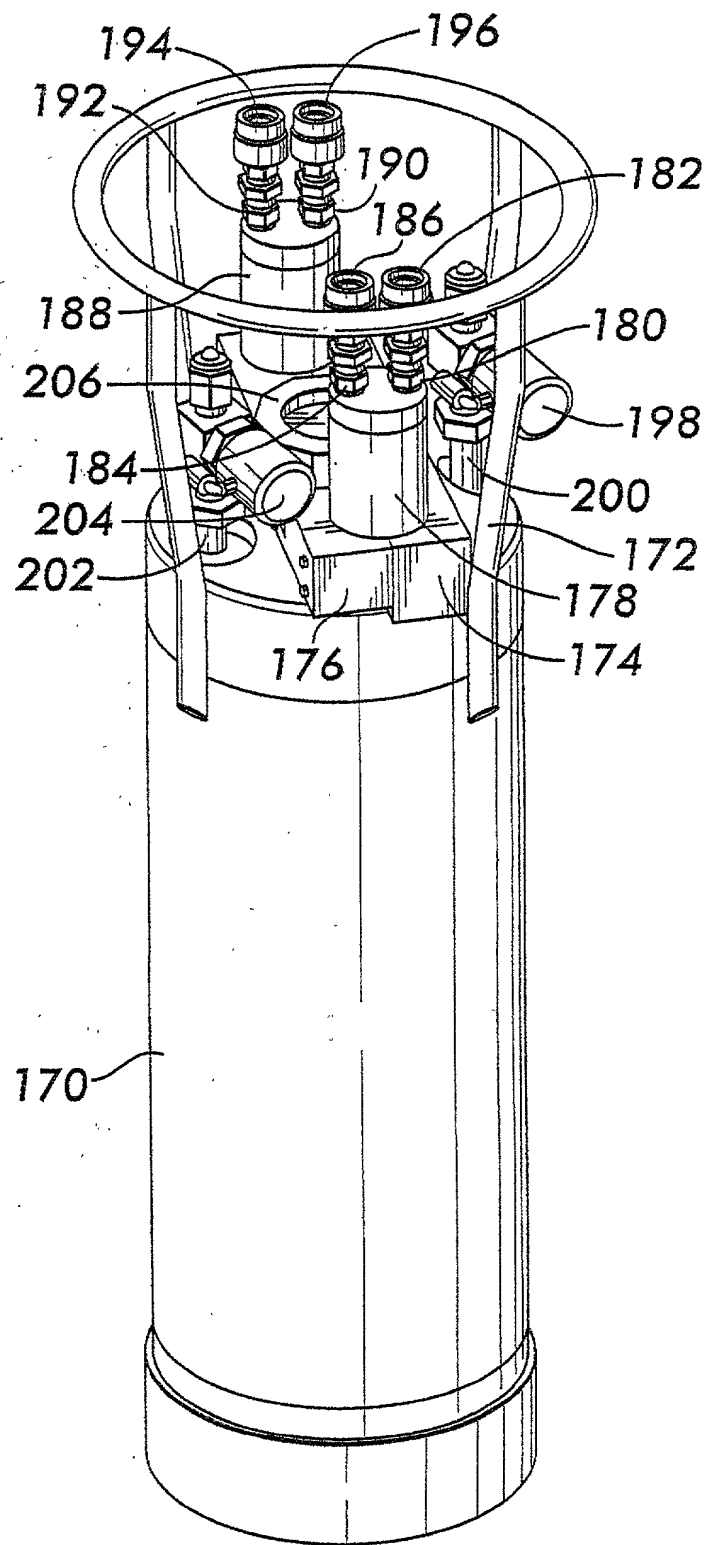


FIG. 7

FIG. 8

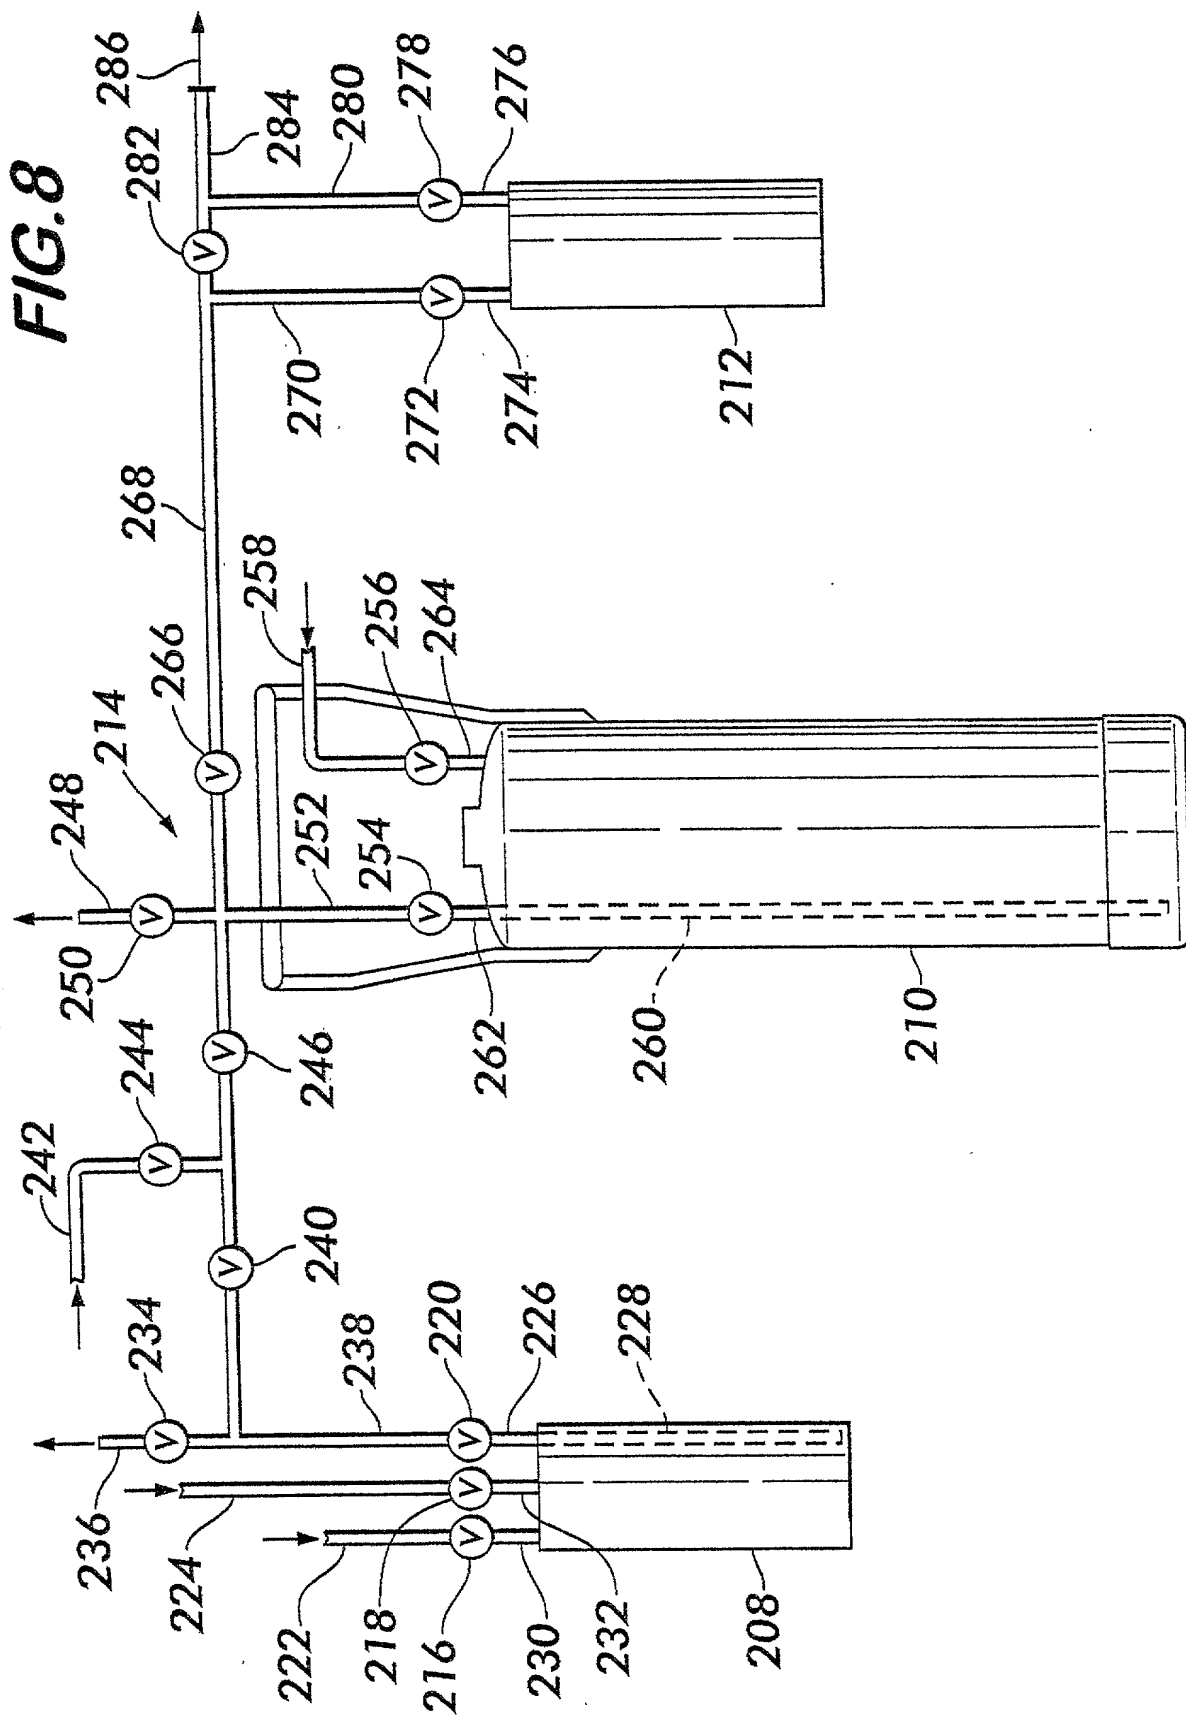

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

**DECLARATION FOR UTILITY OR
DESIGN
PATENT APPLICATION
(37 CFR 1.63)**

☐ Declaration Submitted with Initial Filing
OR
☐ Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)

Attorney Docket Number	06031P USA
First Named Inventor	Robert Sam Zorich
COMPLETE IF KNOWN	
Application Number	/
Filing Date	September 29, 2000
Group Art Unit	
Examiner Name	

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Multiple Contents Container Assembly For Ultrapure Solvent Purging

the specification of which (Title of the Invention)

☒ is attached hereto

OR

☐ was filed on (MM/DD/YYYY) as United States Application Number or PCT International

Application Number and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)
60/213902	06/21/2000
60/2157926	07/05/2000

☐ Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/S

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact with the Patent and Trademark Office connected therewith:

☒ Customer Number

OR

☐ Registered practitioner(s) name/registration number listed below

Name	Registration Number	Name



23543

Air Products and Chemicals, Inc.

☐ Additional registered practitioner(s) named on supplemental

Direct all correspondence to: ☒ Customer Number or Bar Code Label



23543

Air Products and Chemicals, Inc.

on sheet PTO/SB/02C attached hereto.

OR ☐ Correspondence address below

Name					
Address					
Address					
City		State		ZIP	
Country		Telephone		Fax	

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle (if any))		Family Name or Surname	
Robert Sam		Zorich	
Inventor's Signature	<i>unrepeated</i>		Date
Residence: City	Carlsbad	State	CA
		Country	USA
Post Office Address	6735 Paseo Del Vista		
Post Office Address			
City	Carlsbad	State	CA
		ZIP	92009
		Country	USA

☒ Additional inventors are being named on the 1 supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

Please type a plus sign (+) inside this box → +

PTO/SB/02A (3-97)
Approved for use through 9/30/98. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION

ADDITIONAL INVENTOR(S)

Supplemental Sheet

Page 1 of 1

Name of Additional Joint Inventor, if any:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])

Family Name or Surname

David Allen

Roberts

Inventor's
Signature

unexecuted

Date

Residence: City

Encinitas

State

CA

Country

USA

Citizenship

USA

Post Office Address

280 Country Haven Road

Post Office Address

City

Encinitas

State

CA

ZIP

92029

Country

USA

Name of Additional Joint Inventor, if any:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])

Family Name or Surname

George Oleg

Voloshin

Inventor's
Signature

unexecuted

Date

Residence: City

San Diego

State

CA

Country

USA

Citizenship

USA

Post Office Address

8344 Menkar Road

Post Office Address

City

San Diego

State

CA

ZIP

92126

Country

USA

Name of Additional Joint Inventor, if any:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])

Family Name or Surname

Inventor's
Signature

Date

Residence: City

State

Country

Citizenship

Post Office Address

Post Office Address

City

State

ZIP

Country

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

SEQUENCE LISTING

Not applicable.